


PILASTER STANDARD DETAIL

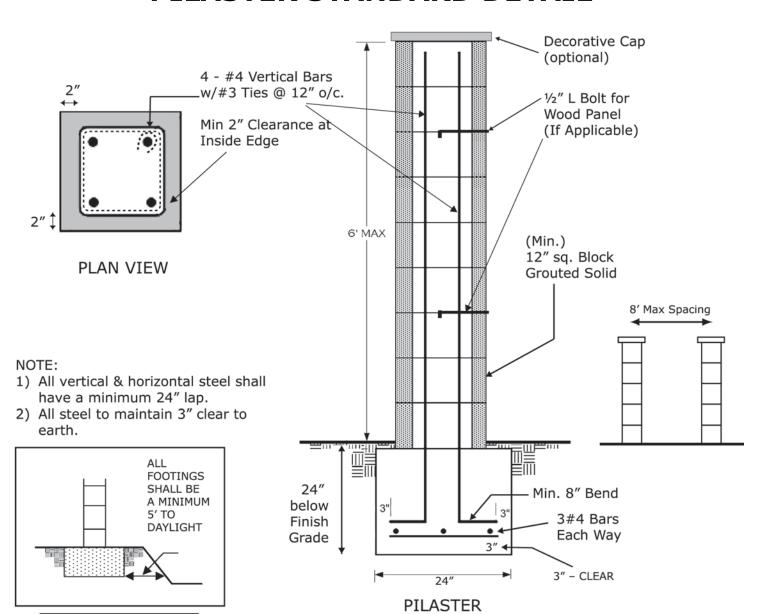

- All footings are to be placed against undisturbed soil.
- Concrete in footing to be 2500 p.s.i.
 @ 28 days
- Concrete block Grade "N" units A.S.T.M. C-90
- Grout 1 part cement, 3 parts sand,
 2 parts pea gravel
- 4. Mortar 2 parts cement, 1 part lime putty, 9 parts sand
- 5. Reinforcing steel minimum grade 40

Inspection Procedures

Inspection requests shall be made before 4:00 p.m. on the business day PRIOR to the desired date of inspection.

- FOUNDATION: After trenches are dug, steel is tied in place and <u>before</u> any concrete placement.
- PRE-GROUT: After all concrete masonry units are laid up, grout stop, horizontal and vertical reinforcement is in place, and <u>before</u> placement of grout.
- 3. FINAL INSPECTION: After grout placement but <u>before</u> cap is installed.